

Compactors

Self-Contained

Compactor / Containers



SCS Model Compactors
Designed for Wet Waste Applications

Their leak-proof construction makes these units ideal for:

Malls | Hotels | Restaurants | Supermarkets
Food processing Plants | Medical Facilities

Standard Features


- Key-Lock Start Switch
- Red Mushroom-Head Stop Button
- Power Unit Factory Ready for 208-230-460 Volt 3 Phase
- Solid State Motor Starter Overload – Adjustable 13-50 Amp
- Automatic Motor Starter Reset
- NEMA 12/13 Panel Box
- Double End Pickup
- Full 360 Degree Rear Door Seal
- Power Unit Weather Cover

Corporate Office
Chicago, Illinois



PH: 866-622-CTEC (2832)
www.c-tecinc.com

Compactors

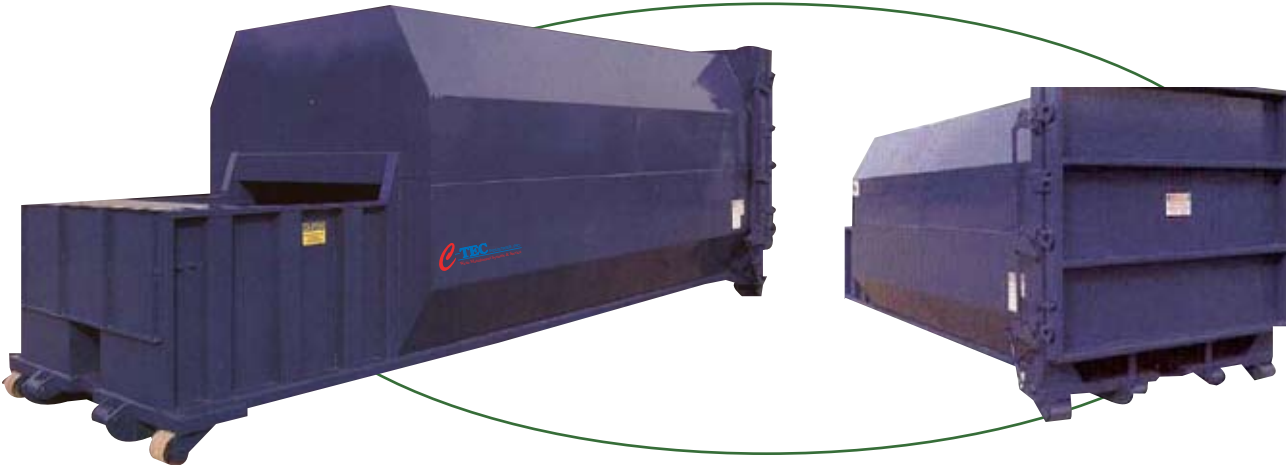

QUALITY

By implementing the highest quality steel fabrication and welding techniques, C-TEC's self-contained compactors are designed and engineered to efficiently and economically handle maximum loads and stresses in commercial and medium industrial situations.

SAFETY

C-TEC models feature industrial grade electrical and hydraulic systems and conforms to all ANSI codes and safety requirements.

OPTIONAL FEATURES

Compactors can be built for your specific needs with custom-fitted side or rear load hoppers, security chutes, decks and other optional equipment.

INDUSTRY EXPERTISE


Specializing exclusively in the manufacturing of refuse equipment, C-TEC provides many years of experience in the industry. C-TEC provides quality equipment with cost-saving benefits.

SPECIFICATIONS

Mfr. Rating:	2 cubic yards	Cycle Time:	0.39
Industry Rating:	1.52 cubic yards	Motor:	0.33
Clear Top Opening:	58" x 40 1/2"	Pump:	24" x 31.5"
Hydraulic Cylinders:	(2) 4" bore x 2 1/2" rod	Frame Floor:	19 3/4' x 31'
Ram Penetration:	6"	Frame Sides:	8 3/4"
Packing Force:	Normal: 46,500 lbs. Maximum Pack-Out: 49,000lbs	Breaker Bar:	70
Ram Face PSI:	Normal: 25.8 PSI Maximum: 27.2 PSI	Ram Face:	15
Hydraulic Pressure:	Normal: 1850 PSI Maximum: 1950 PSI	Ram Floor:	14.432
Ram Face Dimensions:	30" x 60"	Ram Top:	16.906
		Ram Sides:	24.1
		Ram Guides:	28.2

DIMENSIONS

Model	Capacity	A	B	C	D	E
SCS1826	26 cu. yds	51"	40"	66 1/2"	19' 0"	8' 9"
SCS2030	30 cu. yds	51"	40"	66 1/2"	21' 0"	8' 9"
SCS2234	34 cu. yds	51"	40"	66 1/2"	23' 0"	8' 9"
SCS2439	39 cu. yds	51"	40"	66 1/2"	25' 0"	8' 9"

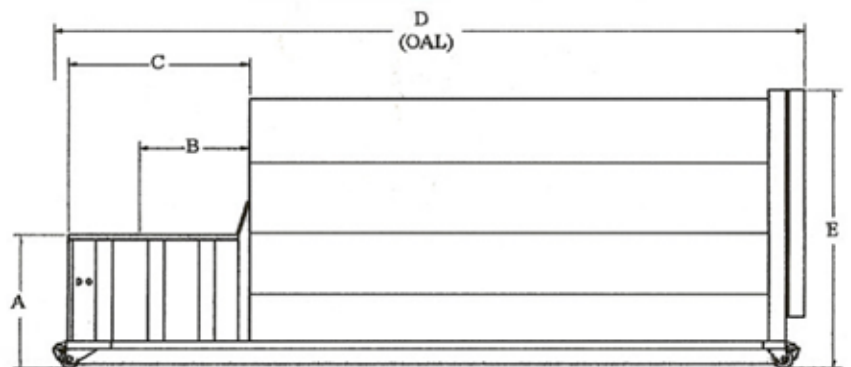

Pictures are for illustration only. Specifications are subject to change without notice to accommodate design changes. All compactors comply with ANSI standards, OSHA standards, and all electrical components are UL certified.