



FRONT LOADING Containers

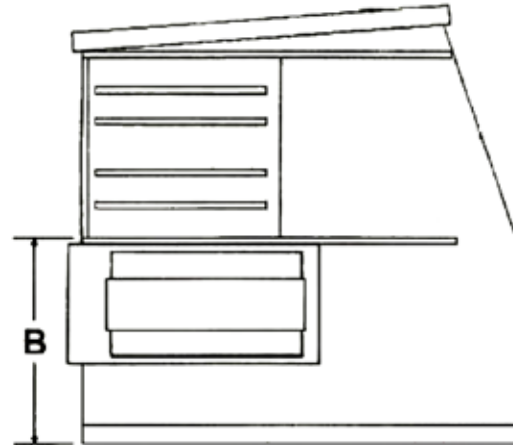

C-TEC has combined many years of development, field testing, and customer input into a new generation of Front Load containers for the waste handling industry. Available in 2 through 10 cubic yard capacities, C-TEC Front Load containers are constructed of quality AISI grade steel, built to exacting specifications, and designed for years of dependable rugged service. Plus, each container meets or exceeds all industry standards and carries a full one year warranty.

FRONT LOADING Containers

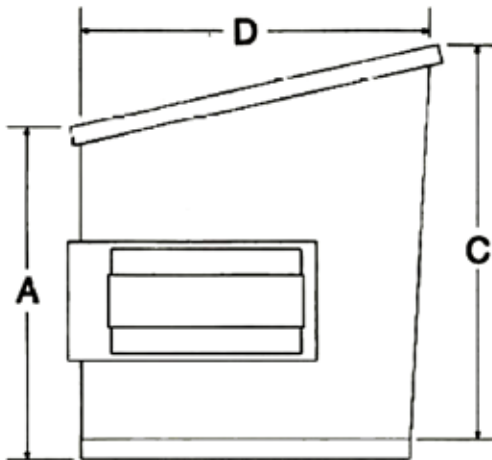

Standard Features:

- Heavy duty 7 ga. fork sleeves with full length totally enclosed gussets
- 7 ga. fork sleeve back up plates with integral extended bumpers
- 7 ga. fork entry guides
- 7 ga. top edge reinforcement channels
- 7 ga. full length bottom reinforcement channels
- 12 ga. side walls
- Side walls reinforced with pressed V-ribs on four through eight cubic yard containers
- Double wall plastic lids
- Two coats of zinc chromate primer applied inside and out
- Two exterior finish coats of high gloss industrial enamel

Optional Features:

- Steel lids
- Casters: 2 rigid, 2 swivel
- Heavy duty 7 ga. bottom
- Steel side doors 6 and 8 cu.yd. containers

Model	FEL 2	FEL 3	FEL 4	FEL 4 LOW P.	FEL 6 STD	FEL 6 SLANT	FEL 8 STD	FEL 8 SLANT	FEL 10
Minimum Capacity Cubic Yds.	2	3	4	4	6	6	8	8	10
Front Loading Height (A)	39	48	51	45.5	63	51	75	51	82
Side Loading Height (B)	N/A	N/A	N/A	N/A	31	N/A	44	N/A	45
Interior Height (C)	41	48	60	47	64	60	76	73.5	80
Interior Depth (D)	36	48	53	55	66	72	72	80	75
Interior Width	72	72	72	72	72	72	72	72	72
Lid Size 2 Each	36 x 42	36 x 58	36 x 58	36 x 58	36 x 58	36 x 58	36 x 58	36 x 58	36 x 58
Side Door Size 2 each H x W	N/A	N/A	N/A	N/A	30 x 30	N/A	30 x 30	N/A	37 x 32